
Disassembling Sony Clie PEG-SJ22 Device

Written By: matt wilson

TOOLS:


- iFixit Opening Tools (1)
- 64 Bit Driver Kit (1)

Step 1 — Disassembling Sony Clie PEG-SJ22 Device

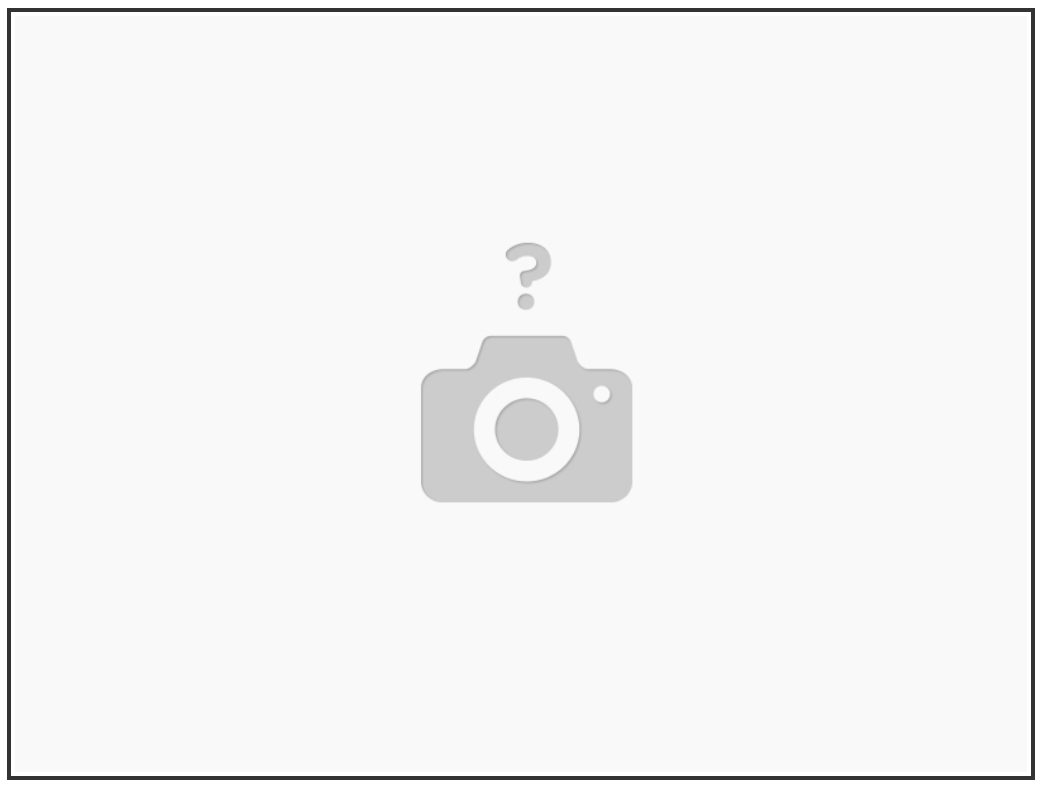


- Remove screws from exterior of case. 2 screws on each side and on bottom

Step 2

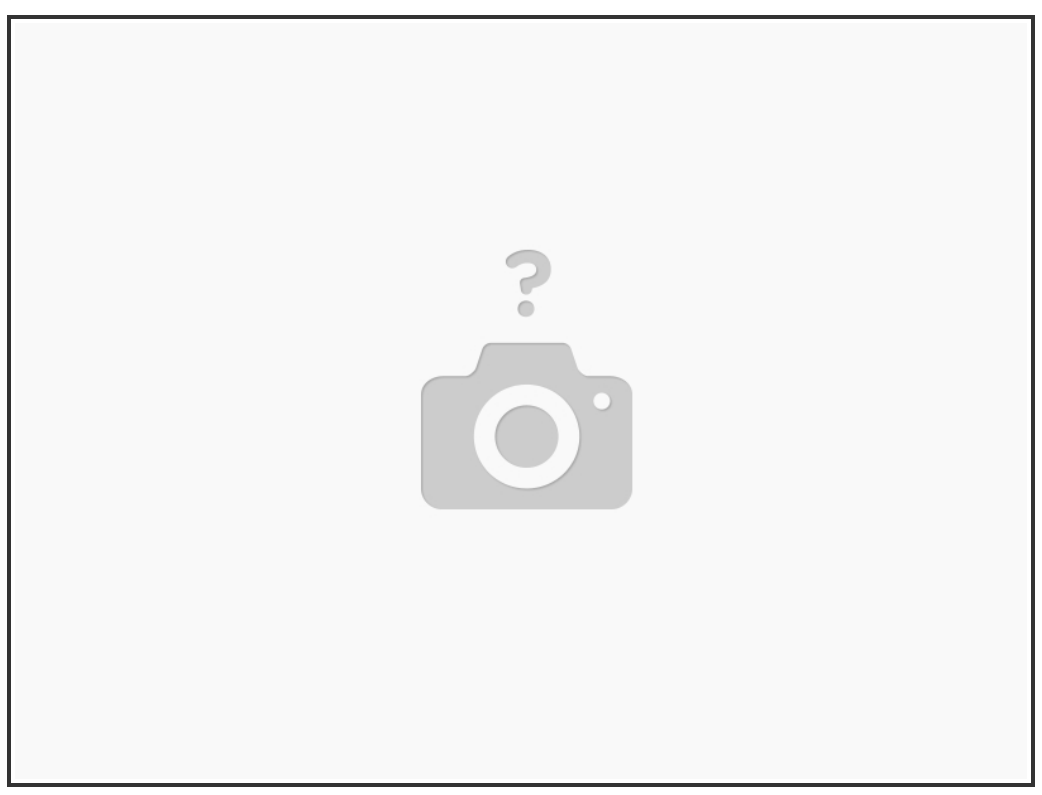


- Use iPod opening tool to remove face plate

Step 3

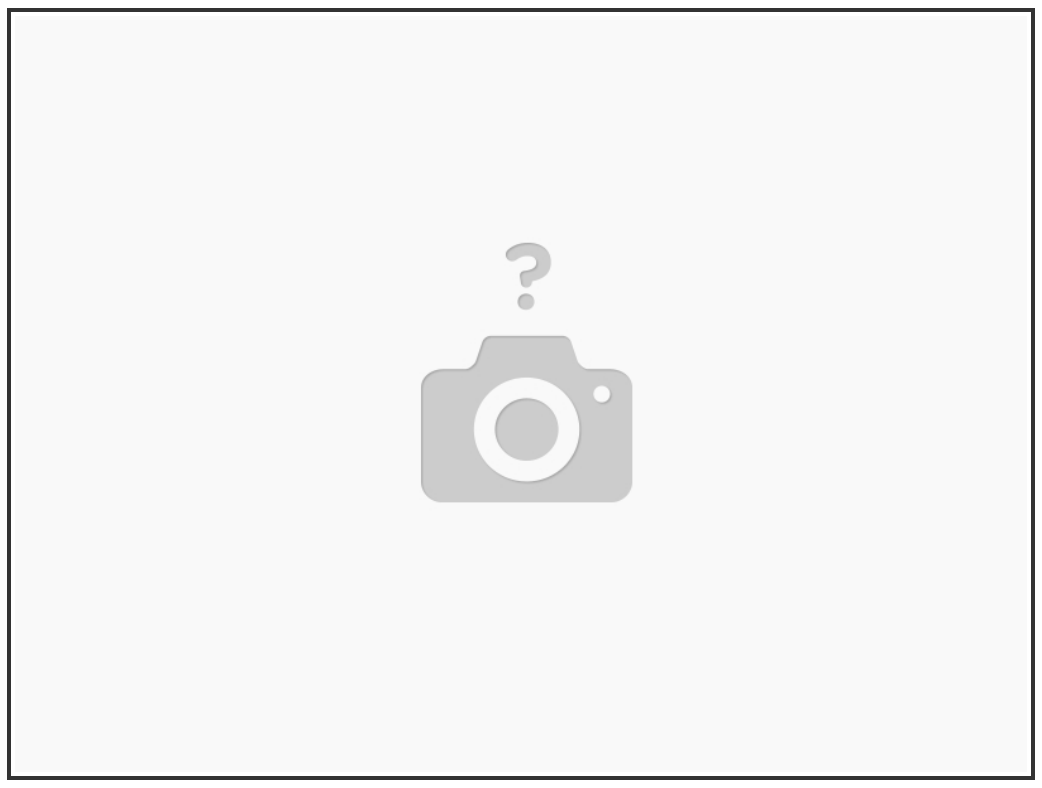

- Pull screen and motherboard out of back of case with iPod opening tool. There should now be three pieces.

Step 4

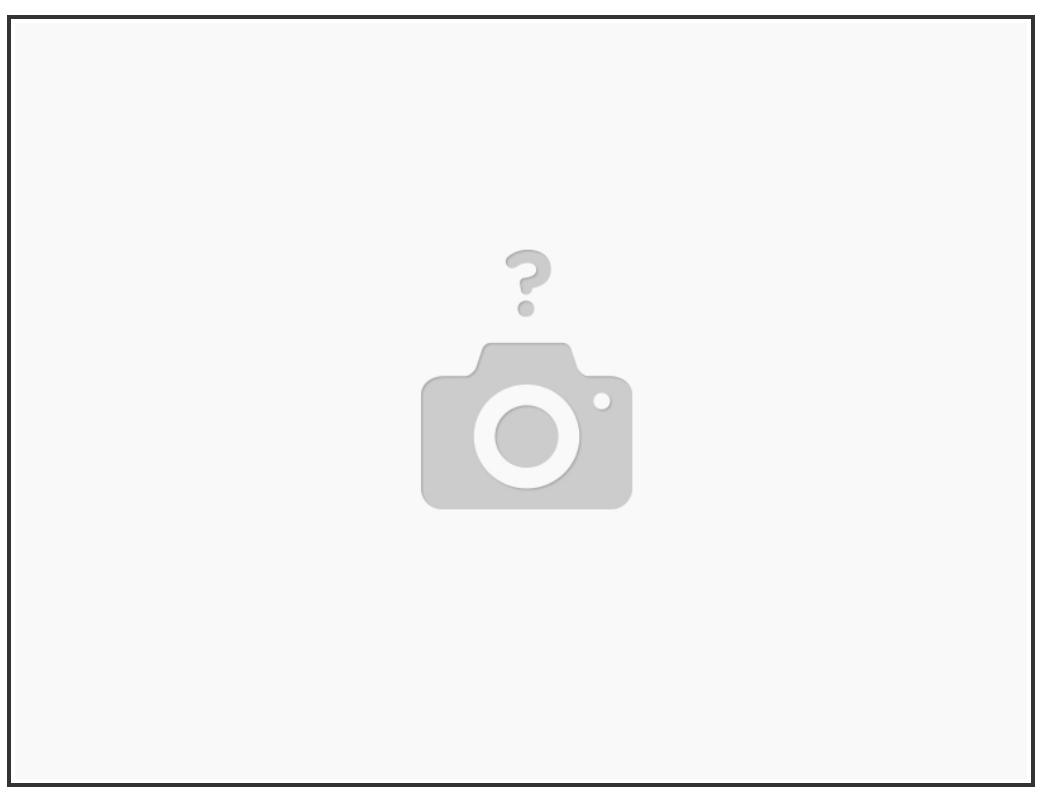

- Unscrew 5 screws from back of motherboard

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 08:38:24 AM.

